



Compliance with relevant ASTM and ISO Standards as well as Industry Engineering specifications

Labino AB LED UV Lights	Built in White Light LED	UV Intensity at 38 cm (15") (µW/cm ²)	COMPLIES WITH ASTM E3022-2018 Standard	COMPLIES WITH Rolls-Royce RRES90061 Specification	COMPLIES WITH Airbus A1176-1001 Testing Method	COMPLIES WITH Pratt & Whitney Requirements	COMPLIES WITH The Boeing Co Requirements	COMPLIES WITH ISO 3059-12 Standard	COMPLIES WITH USAF Requirements
GX SERIES – OVERHEAD LIGHT									
GX Orion REMOTE	✓	1 500-7 000	✓	-	-	-	-	✓	-
GX Orion UV & WH	✓	≈ 7 000	✓	✓	✓	✓	-	✓	-
GX Orion UV	-	≈ 4 500	✓	✓	✓	✓	✓	✓	✓
BB 2.0 SERIES – HANDHELD LIGHT									
BB 2.0 Helios	-	≈ 9 000	✓	-	✓	✓	-	✓	✓
BB 2.0 Ikaros	-	≈ 4 000	✓	✓	✓	✓	✓	✓	✓
BB 2.0 Artemis	-	≈ 22 000	✓	-	-	-	-	✓	-
MB 3.0 SERIES – HANDHELD LIGHT									
Hercules Ex	-	≈ 4 000	✓	✓	✓	✓	✓	✓	✓
MB 3.0 Zeus	✓	≈ 4 500	✓	✓	✓	✓	✓	✓	-
MB 3.0 Zeus with Athena	✓	≈ 4 500	✓	✓	✓	✓	✓	✓	-
MB 3.0 Hermes	-	≈ 4 500	✓	✓	✓	✓	✓	✓	✓
MB 3.0 Hermes with Athena	-	≈ 4 500	✓	✓	✓	✓	✓	✓	✓
MB 3.0 Selene	✓	≈ 9 000	✓	-	✓	✓	-	✓	-
MB 3.0 Selene with Athena	✓	≈ 9 000	✓	-	✓	✓	-	✓	-
MB 3.0 Atlas	-	≈ 9 000	✓	-	✓	✓	-	✓	✓
MB 3.0 Atlas with Athena	-	≈ 9 000	✓	-	✓	✓	-	✓	✓
MB 2.0 SERIES – FLASHLIGHT / HEADLIGHT									
UVG3 2.0 Spotlight	-	≈ 80 000	✓	-	-	-	-	✓	-
UVG3 2.0 Midlight	-	≈ 9 000	✓	-	✓	✓	-	✓	✓
UVG3 2.0 Floodlight	-	≈ 4 000	✓	✓	✓	✓	✓	✓	✓
UVG5 2.0 Spotlight	optional	≈ 80 000	✓	-	-	-	-	✓	-
UVG5 2.0 Midlight	optional	≈ 9 000	✓	-	✓	✓	-	✓	✓
UVG5 2.0 Floodlight	-	≈ 4 000	✓	✓	✓	✓	✓	✓	✓

PLEASE NOTE: The above models are in compliance with the above ASTM and ISO standards as well as industry specifications as indicated on the table above irrespective of the power source (Battery or Mains).



UVG3 2.0 SERIES

PENETRANT RESISTANT UV INSPECTION LIGHT

ROLLS-ROYCE RRES 9006I COMPLIANT MODEL



PENETRANT RESISTANT • CURRENT REGULATOR HOMOGENEOUS BEAM • IP68 WATERPROOF

Option 1: UVG3 2.0 Spotlight	Option 2: UVG3 2.0 Midlight	Option 3: UVG3 2.0 Floodlight
Part Number: L134	Part Number: L135	Part Number: L136
Irradiance: $\approx 90\,000\ \mu\text{w}/\text{cm}^2$	Irradiance: $\approx 9\,000\ \mu\text{w}/\text{cm}^2$	Irradiance: $\approx 4\,000\ \mu\text{w}/\text{cm}^2$
Beam diameter $> 1000\ \mu\text{w}/\text{cm}^2$: 3 inches / 7 $\frac{3}{8}$ cm	Beam diameter $> 1000\ \mu\text{w}/\text{cm}^2$: 3 $\frac{3}{4}$ inches / 9 $\frac{1}{2}$ cm	Beam diameter $> 1000\ \mu\text{w}/\text{cm}^2$: 4 $\frac{1}{8}$ inches / 12 cm
Battery running time: 4 hours	Battery running time: 8 hours	Battery running time: 4 hours
COMPLIES WITH ASTM E3022-2015 Standard	COMPLIES WITH ASTM E3022-2015 Standard	COMPLIES WITH ASTM E3022-2015 Standard
		COMPLIES WITH Rolls-Royce RRES 9006I Specification
		COMPLIES WITH Airbus AITM-1001 Testing Method
		<i>UVG3 2.0 Floodlight is the only torch UV LED light in the world in compliance with Rolls-Royce RRES 9006I and Airbus AITM-1001!</i>

INCLUDED IN THE PACKAGE




SINGLE KIT: 1 UVG3 2.0 lamp, 1 UV goggles, 1 external charger, 1 car charger, 2 extra batteries, 1 carrying case, 1 belt holster, 1 rubber bumper



DOUBLE KIT: 2 UVG3 2.0 lamps, 1 UV goggles, 1 external charger, 1 car charger, 3 extra batteries, 1 carrying case, 2 belt holsters, 2 rubber bumpers

UVG3 2.0 SERIES ACCESSORIES

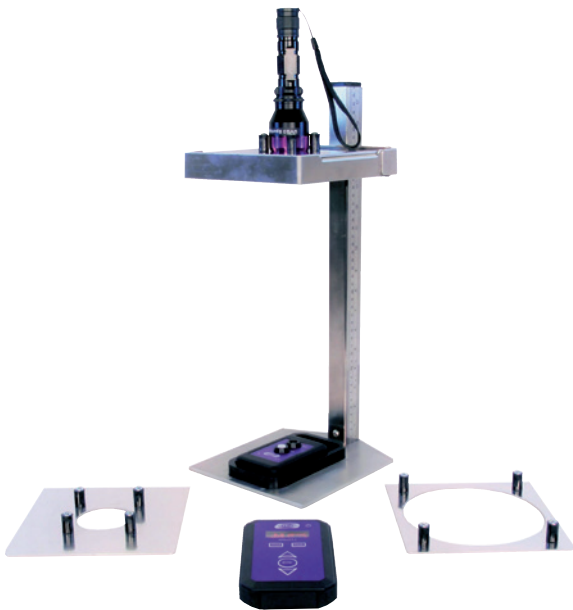

DAILY CHECKS CAN BE DONE WITH OLYMPOS MEASUREMENT STAND (P/N: A542)



UVG VARIABLE GOOSENECK ARM (P/N: A532)



RUBBER BUMPER (P/N: F107)



MAKES IT BRIGHT