



Digital AOS ABS Caliper

Item number: 500-182-30



Images



Description


This digimatic caliper allows you to take reliable measurements and offers you the following benefits:

- AOS (Advanced Onsite Sensor) induction type encoder used in top-of-the-line ABS coolant-proof calipers
- Thanks to the adoption of the electromagnetic induction type ABS encoder, this caliper can be used without concern for contamination on the scale face during measurement. Detection signal is not affected by dirt (water, oil, etc.) on surface of a scale.
- ABS (ABSOLUTE) scale requires no origin setting after power-on and has no limit to response speed.

Features

Range:	0 - 200
Depth bar:	flat
Data output:	No
Max. Permissible Error E MPE:	±0,02 mm
Max. Permissible Error S MPE:	±0,04 mm
Digital step:	0.01 mm
Max. response speed:	Unlimited mm/s
ORIGIN (ABS-Zero):	Yes
ON/OFF:	Yes
ABS / INC (INC ZERO):	Yes
Low voltage alarm:	Yes
Battery life:	Approx. 5 years under normal use
Mass:	194

Dimensions

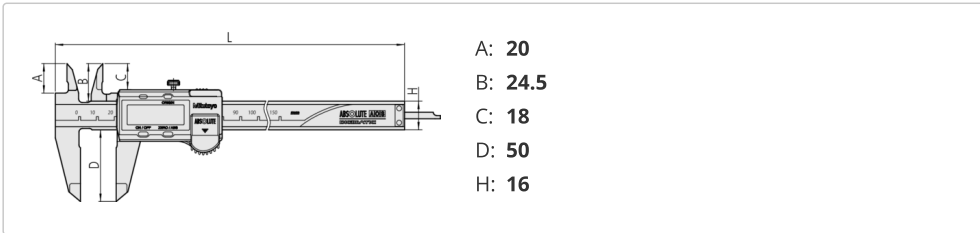

Accessories

Standard accessories:



Depth Base Attachment for Caliper, 75mm width
75mm width for 100, 150, 200mm Range
050083-10



Depth Base Attachment for Caliper
100mm width for 100, 150, 200mm Range
050084-10

Spare parts

Consumable spares:



Battery SR44 1.5V
938882