





Dial Test Indicator, Horiz. 20° Face
 Item number: 513-443-10T



Images

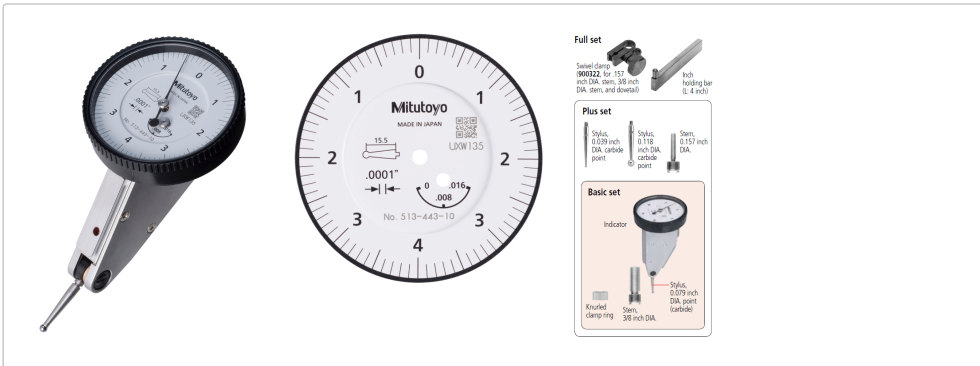

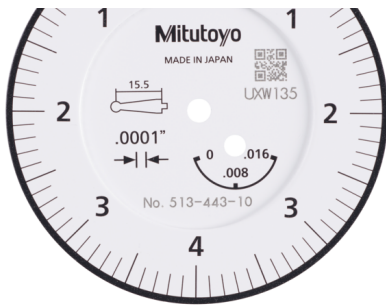**Full set**

Swivel clamp
900322, for 157
inch DIA, stem, 3/8 inch
DIA, stem, and dowel)

**Plus set**

Stylus,
0.039 inch
DIA, carbide
point

Stylus,
0.118
inch DIA,
carbide
point

Stem,
0.157 inch
DIA.

Basic set

Indicator

Stylus,
0.079 inch
DIA, point
(carbide)

Knurled
clamp ring


Stem,
3/8 inch DIA.


Description

A Mitutoyo versatile anti-magnetic type lever indicator (or dial test indicator, DTI) suited to alignment operations on machine tools and similar applications. This indicator automatically adapts to the required measuring direction on contact, and the jewelled movement provides lowest friction and stiction for smooth and precise operation. Supplied with a comprehensive set of mounting accessories and interchangeable styli that enable immediate use in almost any situation.

Features

Digital/Analog:	Analog
Inch-Metric:	Inch
Graduation:	0.002
Scale:	0-4-0
Accuracy:	±0.0002"
Error of indication one revolution:	±0.0002"
H MPE (Hysteresis):	0,0001"
R MPE (Repeatability):	±0,00004"
Measuring force:	0,01-0,3
Contact point:	Thread M 1.7 x 0.35
Delivered:	In a box with stem ø3/8" and 0.157", stylus ø0.039"/0.079"/0.118", swivel clamp and holding bar
Mass:	48
L1:	19
L2:	15.5
[mm]:	
Functions:	Full set

Dimensions

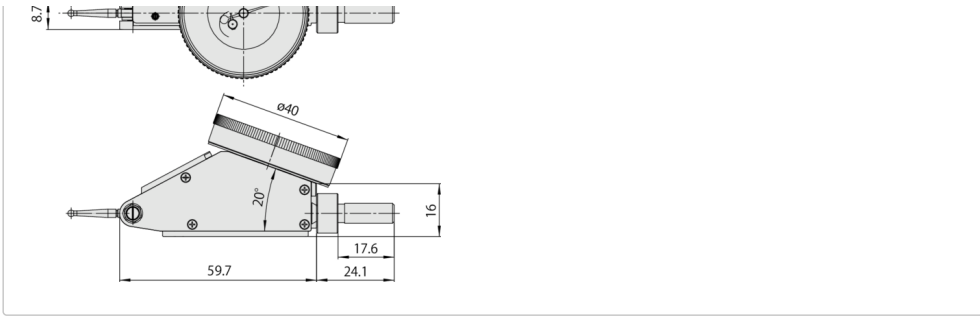

Accessories

Optional accessories:



Limit Hands (Green) 2 pcs.
Dial Indicator Series 1, Test Indicator
21AAB363