


**LMT105**

LMECE-A12E-QSKG-2/US

Level sensors

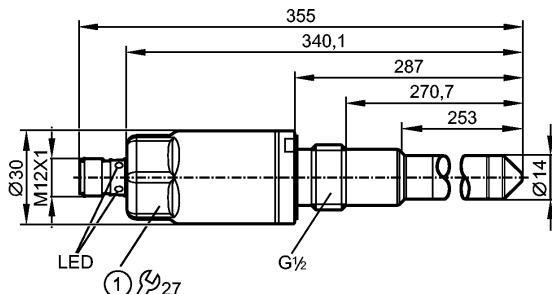

1: tightening torque 20...25 Nm

Made in Germany

CE FDA IO-Link

Product characteristics

Electronic level sensor

Connector

Process connection: G 1/2 A

Communication interface: IO-Link 1.1 (COM2 slave, 38.4 kBaud)

Gold-plated contacts

2 switching outputs

Application

Application liquid, viscous and powdery media

Recommended media water, water-based media, oils, oil-based media, powdery media

Cannot be used for: See the operating instructions, chapter "Function and features".

Medium temperature oil

- Continuous [°C] -20...100

- Short time [°C] -20...150 (1 h)

Medium temperature water and hydrous media

- Continuous [°C] -20...85

- Short time [°C] -20...150 (1 h)

Electrical data

Electrical design DC PNP/NPN

Operating voltage [V] 18...30 DC

Current consumption [mA] < 50

Protection class III

Reverse polarity protection yes

Outputs

Output 2 switching outputs

Output function 2 x normally open / closed programmable

Current rating [mA] 100

Voltage drop [V] < 2.5

Short-circuit protection pulsed

Overload protection yes

Interfaces

IO-Link Device

Transfer type COM2 (38.4 kBaud)

IO-Link revision 1.1

SDCI standard IEC 61131-9 FDIS

**LMT105**

LMECE-A12E-QSKG-2/US

Level sensors

IO-Link Device ID	370 d / 00 01 72 h
Profiles	Smart Sensor: Process Data Variable; Device Identification
SIO mode	yes
Required master port type	A
Process data analogue	1
Process data binary	2
Min. process cycle time [ms]	2.3

Environment

Ambient temperature [°C]	-20...85, at max. 100 °C medium temperature (-20...60 °C at max. 150 °C medium temperature)
Storage temperature [°C]	-40...85
Maximum vessel pressure [bar]	-1...40
Protection	IP 68 / IP 69K

Tests / approvals

EMC	DIN EN 61000-6-2 : 2006
	DIN EN 61000-6-4 : 2011 / (closed tanks)
Shock resistance	DIN EN 60068-2-27: 50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6: 8 g (10...2000 Hz)

Mechanical data


Process connection	G ½ A
Materials (wetted parts)	PEEK; surface characteristics: Ra < 0.8; stainless steel 316L / 1.4404; stainless steel 316Ti / 1.4571; FKM
Housing materials	stainless steel 316L / 1.4404; stainless steel (1.4571/316Ti); PEEK; PEI; FKM
Weight [kg]	0.357

Displays / operating elements

Display	Switching status 2 LED yellow operating status 2 LED green
---------	---

Electrical connection

Connection	M12 connector; Gold-plated contacts
------------	-------------------------------------

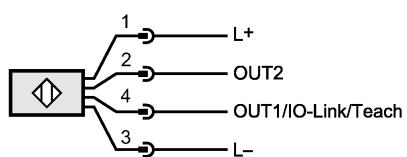Wiring**Remarks**

Pack quantity	[piece]	1
---------------	---------	---