


**O7E201**

O7E-HPKG/0.20M/AS

Photoelectric sensors

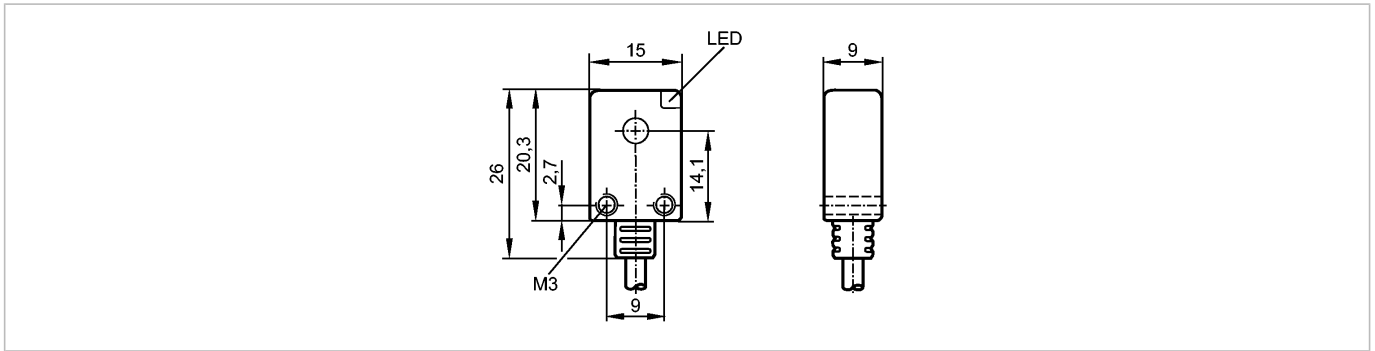

Made in Germany

**Product characteristics**

Through-beam sensor

Rectangular, plastics

Cable with connector

Receiver

Sensing range 0...1.5m

**Electrical data**

Electrical design		DC PNP
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	10 (24 V)
Type of light		Red light
Protection class		III
Reverse polarity protection		yes

**Outputs**

Output function		light-on mode
Voltage drop	[V]	< 2.5
Current rating	[mA]	100
Short-circuit protection		pulsed
Switching frequency	[Hz]	1000

**Range**

Sensing range	[m]	0...1.5
---------------	-----	---------

**Environment**

Ambient temperature	[°C]	-25...60
Protection		IP 65

**Tests / approvals**

EMC		EN 60947-5-2
MTTF	[Years]	1312

**Mechanical data**

Housing materials		PA
Lens material		PMMA
Weight	[kg]	0.017

**Displays / operating elements**

Output status indication	LED	yellow
--------------------------	-----	--------

**Electrical connection**



Connection	PUR cable / 0.2 m; 3 x 0.14 mm <sup>2</sup> ; with M8 connector, (snap-fit)	
------------	---	--

## O7E201

O7E-HPKG/0.20M/AS

Photoelectric sensors

### Wiring



### Remarks

Remarks	UL - Class 2 source required
Pack quantity [piece]	1