


**OF5012**

OFT-FPKG/US-100

Photoelectric sensors

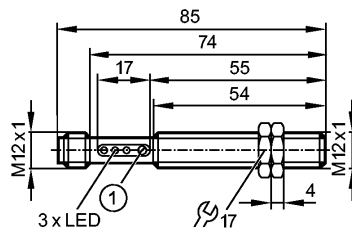

1: potentiometer

Made in Germany



**Product characteristics**

Diffuse reflection sensor
Threaded type
M12 x 1
Connector
Function check output
Range 1...200mm (referred to white paper 200 x 200 mm)
adjustable

**Electrical data**

Electrical design	DC PNP
Operating voltage [V]	10...36 DC
Current consumption [mA]	< 35
Type of light	Infrared light 880 nm
Protection class	II
Reverse polarity protection	yes

**Outputs**

Output function	light-on / dark-on programmable
<b>Voltage drop</b>	
- Switching output [V]	< 2.5
- Function check output [V]	< 3.5
<b>Current rating</b>	
- Switching output [mA]	200
- Function check output [mA]	10
Short-circuit protection	pulsed
Overload protection	yes
Switching frequency [Hz]	320

**Range**


Range [mm]	1...200 (referred to white paper 200 x 200 mm)
Light spot diameter [mm]	92 ( at maximum range )

**Excess gain graphs**

## OF5012

OFT-FPKG/US-100

Photoelectric sensors

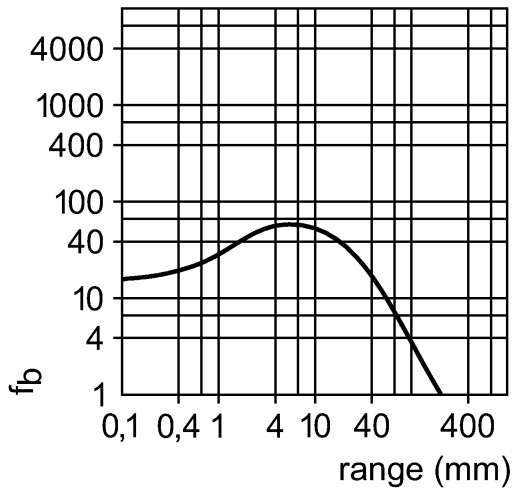

### Environment

Ambient temperature	[°C]	-25...60
Protection		IP 65

### Tests / approvals

EMC		EN 60947-5-2 EN 55011:	class B
MTTF	[Years]		607

### Mechanical data

Housing materials		Brass nickel-plated
Lens material		PMMA
Weight	[kg]	0.047



### Displays / operating elements

Output status indication	LED	yellow
Operation	LED	green
Function display	LED	Red

### Electrical connection

Connection		M12 connector
------------	--	---------------

### Wiring



2: function check

### Accessories

Accessories (included)		2 lock nuts; screwdriver
------------------------	--	--------------------------

### Remarks

Pack quantity	[piece]	1
---------------	---------	---